

What YOU Can DO...

- ◆ Let water pond. Runoff should temporarily pond in the swale for 24 to 36 hours.
- ◆ Mow the swale but keep it at a good grass growth.
- ◆ Remove and compost leaves and grass clippings from swales.
- ◆ Minimize use of fertilizers, pesticides and herbicides.
- ◆ Understand that sometimes swales must be dug out in order to reestablish their shape — this allows swales to continue doing their job, collecting soil so it does not reach water bodies.
- ◆ Do not pile garbage, trash, leaves, limbs or garden debris in swales — this adds pollutants which can wash into downstream waters.
- ◆ Do not pave the swale — this reduces the filtration and infiltration of runoff.
- ◆ Do not park vehicles in the swale — this compacts the soil so less runoff soaks in.


**BE PART OF THE
SOLUTION,
Contact the following
for more information!**

**FLORIDA DEPARTMENT OF
ENVIRONMENTAL PROTECTION**
Nonpoint Source Management
2600 Blair Stone Road
Tallahassee, FL 32399-2400
Phone: (850) 245-7508

**MIDWEST RESEARCH INSTITUTE
FLORIDA DIVISION
EDUCATIONAL PROGRAMS**
1470 Treeland Blvd., SE
Palm Bay, FL 32909
Phone: (321) 723-4547

Swale & Berm Drawing from
Brevard County Surface Water
Improvement

Save the SWALES

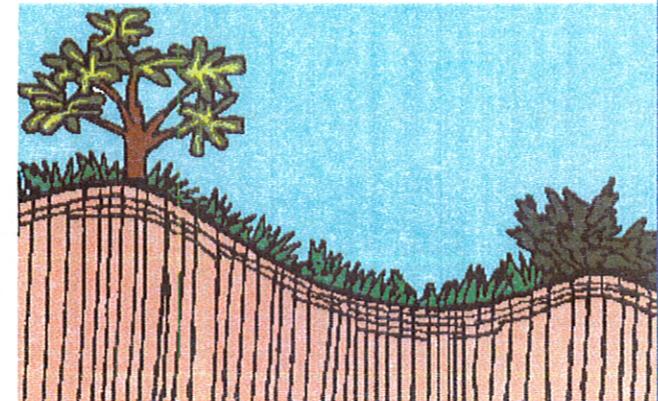

**Protect Florida's
Water**

Do you know what a swale is? How about a berm?


When land is converted from its natural state to other uses, such as roads, homes, and shopping centers, many impervious or paved surfaces are created.

Rainfall becomes stormwater when it can no longer soak into the ground and “runs off” the impervious surfaces.

The volume, speed and pollutants of stormwater runoff increase with land development.

Stormwater management practices are used to retain or detain runoff to filter out the pollutants.

These practices also minimize flooding, protect property and reduce pollution of water bodies.

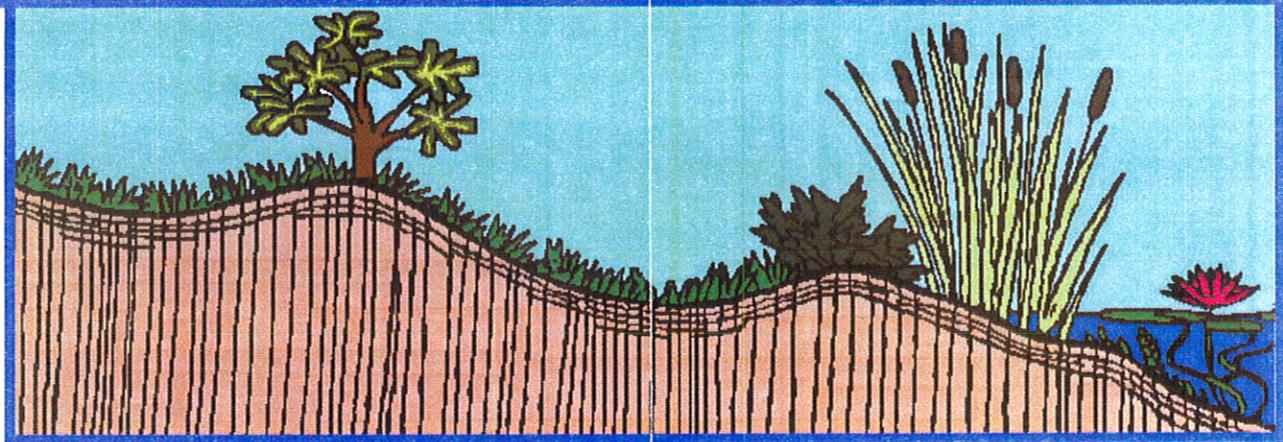

SWALES are one of the most commonly used stormwater practices.

For many years, swales have been used to direct runoff from rural highways and residential streets

Today, swales not only direct stormwater but also help filter runoff and reduce pollutants.

A swale slows down the rapid flow of stormwater runoff by ponding water between its sloping sides, often called berms.

The ponding not only slows the rate of flow but allows pollutants to settle out of the water.

When the swale becomes full, the cleaner surface water will spill over the berm and slowly run into a local water body.

Eventually, the remaining ponded water will either evaporate or infiltrate into the soil.